

Precision 5470

Technical Guidebook

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Chapter 1: Views of Precision 5470	5
Right	5
Left	5
Top	6
Front	7
Bottom	8
Service Tag	8
Battery charge and status light	9
Chapter 2: Specifications of Precision 5470	10
Dimensions and weight	10
Processor	10
Chipset	11
Operating system	11
Memory	11
External ports	12
Internal slots	12
Wireless module	12
Audio	13
Storage	13
Media-card reader	14
Keyboard	14
Camera	15
Touchpad	15
Power adapter	16
Battery	16
Display	17
Fingerprint reader	18
Sensor	18
GPU—Integrated	19
Multiple display support matrix	19
GPU—Discrete	19
Multiple display support matrix	19
Hardware security	20
Smart-card reader	20
Contactless smart-card reader	20
Contacted smart-card reader	22
Operating and storage environment	22
Chapter 3: Engineering specifications	24
Wireless module	24
Intel AX211, 2x2 MIMO, 2400 Mbps, 2.4/5/6 GHz, Wi-Fi 6E (WiFi 802.11ax), Bluetooth 5.2	24
GPU—Integrated	25
Intel Iris X ^e Graphics	25

GPU—Discrete.....	26
NVIDIA RTX A1000 laptop, 4 GB, GDDR6.....	26
Video port and resolution matrix.....	26
Storage.....	27
M.2 2230, 256 GB, PCIe NVMe Gen4 x4, Class 35 SSD.....	27
M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD.....	27
M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	28
M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	28
M.2 2280, 4 TB, PCIe NVMe Gen4 x4, Class 40 SSD.....	29
M.2 2280, 512 GB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive.....	30
M.2 2280, 1 TB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive.....	30
M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD, self-encrypting drive.....	31
M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD, self-encrypting drive.....	31
Media-card reader	32
Power adapter.....	33
Accessories.....	33
Security.....	34
Software security.....	34
Fingerprint reader.....	34
Dell ControlVault 3.0	35
Trusted Platform Module.....	35
Mil-SPEC.....	35
Chemical information.....	37
Thermal and acoustic improvements.....	39
System management features.....	39
Dell Client Command Suite for In-Band systems management	39
Out of Band Systems Management.....	40
Chapter 4: Low blue light.....	41
Chapter 5: Dell Optimizer.....	42
Chapter 6: Color, material, and finish	43
Chapter 7: Keyboard shortcuts of Precision 5470.....	44
Chapter 8: Getting help and contacting Dell.....	46

Views of Precision 5470

Right



1. microSD-card slot

Reads from and writes to the micro-SD card. The computer supports the following card types:

- microSecure Digital (micro-SD)
- microSecure Digital High Capacity (micro-SDHC)
- microSecure Digital Extended Capacity (micro-SDXC)

2. Thunderbolt 4.0 ports with Power Delivery and DisplayPort

Supports USB4, DisplayPort 1.4, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.

NOTE: You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, see the knowledge base article [000124295](https://www.dell.com/support/000124295) at www.dell.com/support.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

NOTE: USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

NOTE: Thunderbolt 4 supports two 4K displays or one 8K display.

3. Security-cable slot (wedge-shaped)

Connect a security cable to prevent unauthorized movement of your computer.

Left



1. Universal audio jack

Connect headphones or a headset (headphone and microphone combo).

2. Thunderbolt 4.0 ports with Power Delivery and DisplayPort

Supports USB4, DisplayPort 1.4, Thunderbolt 4 and also enables you to connect to an external display using a display adapter. Provides data transfer rates of up to 40 Gbps for USB4 and Thunderbolt 4.

NOTE: You can connect a Dell Docking Station to the Thunderbolt 4 ports. For more information, see the knowledge base article [000124295](https://www.dell.com/support) at www.dell.com/support.

NOTE: A USB Type-C to DisplayPort adapter (sold separately) is required to connect a DisplayPort device.

NOTE: USB4 is backward compatible with USB 3.2, USB 2.0, and Thunderbolt 3.

NOTE: Thunderbolt 4 supports two 4K displays or one 8K display.

3. Smart card reader slot

Provides physical electronic authorization for access control to the resources.

Supports both Contactless and Contacted Smart Cards.

Provides personal identification, authentication, data storage, and application processing.

Top



1. Microphone

Provides digital sound input for audio recording, voice calls, and so on.

2. Power button with optional fingerprint reader

Press to turn on the computer if it is turned off, in sleep state, or in hibernate state.

When the computer is turned on, press the power button to put the computer into sleep state; press and hold the power button for four seconds to force shut-down the computer.


If the power button has a fingerprint reader, place your finger on the power button to log in.

NOTE: You can customize power-button behavior in Windows. For more information, see *Me and My Dell* at www.dell.com/support/manuals.

3. Precision touchpad

Move your finger on the touchpad to move the mouse pointer. Tap to left-click and two fingers tap to right-click.

Front

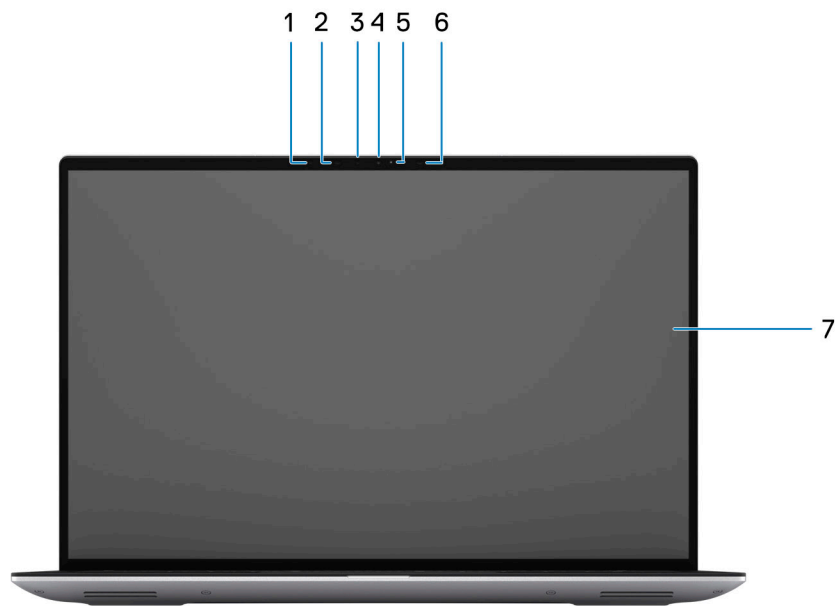

1. Ambient-light sensor

The sensor detects the ambient light and automatically adjusts the keyboard backlight and display brightness.

2. Infrared LED

3. Infrared camera

Enhances security when paired with Windows Hello face authentication.

4. RGB camera

Enables you to video chat, capture photos, and record videos.


5. LEN indicator

6. Infrared LED

7. LCD panel

Provides visual output to the user.

Bottom

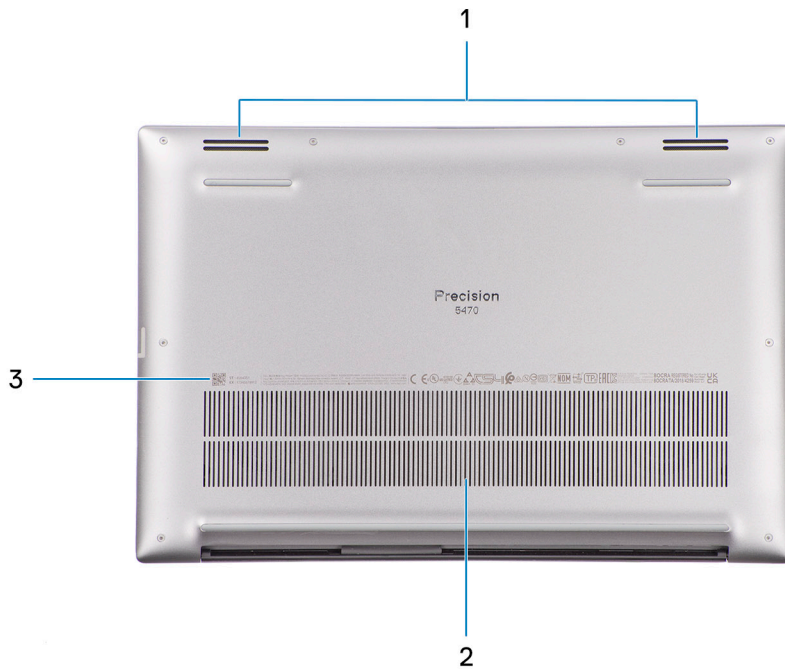

1. Speakers

Provide audio output.

2. Air vents

Air is pulled by the internal fans through the air vents.


NOTE: To prevent the computer from overheating, ensure that the air vents are not blocked when the computer is running.

3. Service Tag and regulatory labels

The Service Tag is a unique alphanumeric identifier that enables Dell service technicians to identify the hardware components in your computer and access warranty information. The regulatory label contains regulatory information of your computer.

Service Tag

The service tag is a unique alphanumeric identifier that allows Dell service technicians to identify the hardware components in your computer and access warranty information.

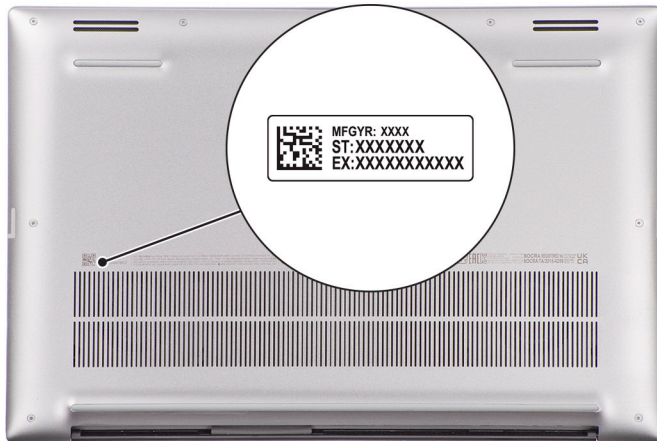

Battery charge and status light

The following table lists the battery charge and status light behavior of your Precision 5470.

Table 1. Battery charge and status light behavior

Power Source	LED Behavior	System Power State	Battery Charge Level
AC Adapter	Off	S0 - S5	Fully Charged
AC Adapter	Solid White	S0 - S5	< Fully Charged
Battery	Off	S0 - S5	11-100%
Battery	Solid Amber (590+/-3 nm)	S0 - S5	< 10%


- S0 (ON) - System is turned on.
- S4 (Hibernate) - The system consumes the least power compared to all other sleep states. The system is almost at an OFF state, expect for a trickle power. The context data is written to hard drive.
- S5 (OFF) - The system is in a shutdown state.

Specifications of Precision 5470

Dimensions and weight

The following table lists the height, width, depth, and weight of your Precision 5470.

Table 2. Dimensions and weight

Description	Values
Height:	
Front height	0.29 in. (7.49 mm)
Rear height	0.43 in. (11.09 mm)
Width	12.22 in. (310.60 mm)
Depth	8.27 in. (210.35 mm)
Weight	3.26 lb (1.48 kg)
 NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.	

Processor

The following table lists the details of the processors supported by your Precision 5470.

Table 3. Processor

Description	Option one	Option two	Option three	Option four	Option five
Processor type	12 th Generation Intel Core i5-12500H, vPro Essential	12 th Generation Intel Core i5-12600H, vPro Enterprise	12 th Generation Intel Core i7-12700H, vPro Essential	12 th Generation Intel Core i7-12800H, vPro Enterprise	12 th Generation Intel Core i9-12900H, vPro Enterprise
Processor wattage	45 W	45 W	45 W	45 W	45 W
Processor core count	4 P cores and 8 E cores	4 P cores and 8 E cores	6 P cores and 8 E cores	6 P cores and 8 E cores	6 P cores and 8 E cores
Processor thread count	16	16	20	20	20
Processor speed	P Cores 3.30 GHz to 4.50 GHz, E Cores 1.80 GHz to 2.50 GHz	P Cores 3.30 GHz to 4.50 GHz, E Cores 2.00 GHz to 2.70 GHz	P Cores 3.50 GHz to 4.70 GHz, E Cores 1.70 GHz to 2.30 GHz	P Cores 3.70 GHz to 4.80 GHz, E Cores 1.80 GHz to 2.40 GHz	P cores 3.80 GHz to 5.00 GHz, E cores 1.80 GHz to 2.50 GHz
Processor cache	18 MB	18 MB	24 MB	24 MB	24 MB
Integrated graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics	Intel Iris X ^e Graphics

Chipset

The following table lists the details of the chipset supported by your Precision 5470.

Table 4. Chipset

Description	Values
Chipset	Intel PCH-LP
Processor	Intel 12 th Generation Intel Core i5/i7/i9
DRAM bus width	64-bit
Flash SPI ROM	64 MB
PCIe bus	Up to Gen4

Operating system

Your Precision 5470 supports the following operating systems:

- Windows 11 Pro, 64-bit with Downgrade Rights (DGR)
- Windows 11 Pro National Education, 64-bit
- Windows 11 Home, 64-bit with DGR
- RedHat Enterprise Linux 8.7
- Ubuntu Linux 20.04 (64-bit)

Memory

The following table lists the memory specifications of your Precision 5470.

Table 5. Memory specifications

Description	Values
Memory slots	Integrated on system board
Memory type	LPDDR5
Memory speed	5200 MHz
Maximum memory configuration	64 GB
Minimum memory configuration	8 GB
Memory configurations supported	<ul style="list-style-type: none">• 8 GB, 2 x 4 GB, LPDDR5, 5200 MHz, integrated, dual-channel• 16 GB, 2 x 8 GB, LPDDR5, 5200 MHz, integrated, dual-channel• 32 GB, 2 x 16 GB, LPDDR5, 5200 MHz, integrated, dual-channel• 64 GB, 2 x 32 GB, LPDDR5, 5200 MHz, integrated, dual-channel

External ports

The following table lists the external ports on your Precision 5470.


Table 6. External ports

Description	Values
USB ports	Four Thunderbolt 4 ports with PowerDelivery and DisplayPort (USB Type-C)
Audio port	One universal audio jack
Video port/ports	Thunderbolt 4 ports with DisplayPort (USB Type-C)
Media-card reader	One SD-card slot
Power-adapter port	Thunderbolt 4 ports with PowerDelivery (USB Type-C)
Security-cable slot	One wedge-shaped security slot

Internal slots

The following table lists the internal slots of your Precision 5470.

Table 7. Internal slots

Description	Values
M.2	M.2 solid-state drive (one M.2 2230 or M.2 2280)  NOTE: To learn more about the features of different types of M.2 cards, search in the Knowledge Base Resource at www.dell.com/support .

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module supported on your Precision 5470.

Table 8. Wireless module specifications



Description	Values
Model number	Intel AX211
Transfer rate	Up to 2400 Mbps
Frequency bands supported	2.4 GHz/5 GHz/6 GHz  NOTE: The 6 GHz frequency is supported on computers installed with Windows 11 operating system only.
Wireless standards	<ul style="list-style-type: none">• WiFi 802.11a/b/g• Wi-Fi 4 (Wi-Fi 802.11n)• Wi-Fi 5 (WiFi 802.11ac)• Wi-Fi 6E (WiFi 802.11ax)  NOTE: 160 MHz channel use, MU-MIMO, new 6 GHz band

Table 8. Wireless module specifications (continued)

Description	Values
Encryption	<ul style="list-style-type: none"> 64-bit and 128-bit WEP 128-bit AES-CCMP TKIP
Bluetooth	Bluetooth 5.2

Audio

The following table lists the audio specifications of your Precision 5470.

Table 9. Audio specifications

Description	Values
Audio controller	Realtek ALC711-VD
Stereo conversion	Supported
Internal audio interface	SoundWire
External audio interface	One universal audio jack
Number of speakers	Four (Two tweeter speakers and two woofer speakers)
Internal-speaker amplifier	Realtek ALC1319D
External volume controls	Keyboard shortcut controls
Speaker output:	
Average speaker output	2 W + 2 W (tweeter), 2 W + 2 W (woofer)
Peak speaker output	2.5 W + 2.5 W (tweeter), 2.5 W + 2.5 W (woofer)
Subwoofer output	Not supported
Microphone	Dual digital-array microphones

Storage

This section lists the storage options on your Precision 5470.

- M.2 2230 PCIe NVMe Gen4 x4, Class 35 SSD
- M.2 2280 PCIe NVMe Gen4 x4, Class 40 SSD
- M.2 2280 PCIe NVMe Gen3 x4, Class 40 SED (Self-Encrypting Drive)
- M.2 2280 PCIe NVMe Gen4 x4, Class 40 SED (Self-Encrypting Drive)

Table 10. Storage specifications

Storage type	Interface type	Capacity
M.2 2230 Class 35 SSD	PCIe NVMe Gen4 x4	256 GB
M.2 2280 Class 40 SSD	PCIe NVMe Gen4 x4	Up to 4 TB


Table 10. Storage specifications (continued)

Storage type	Interface type	Capacity
M.2 2280 Class 40 SED (Self-Encrypting Drive)	PCIe NVMe Gen3 x4	Up to 1 TB
M.2 2280 Class 40 SED (Self-Encrypting Drive)	PCIe NVMe Gen4 x4	Up to 1 TB

Media-card reader

The following table lists the media cards supported by your Precision 5470.


Table 11. Media-card reader specifications

Description	Values
Media-card type	micro-SD card
Media-cards supported	<ul style="list-style-type: none"> • micro-Secure Digital (SD) • micro-Secure Digital High Capacity (SDHC) • micro-Secure Digital Extended Capacity (SDXC)
<p> NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.</p>	

Keyboard

The following table lists the keyboard specifications of your Precision 5470.

Table 12. Keyboard specifications

Description	Values
Keyboard type	Backlit keyboard
Keyboard layout	QWERTY
Number of keys	<ul style="list-style-type: none"> • United States and Canada: 79 keys • United Kingdom: 80 keys • Japan: 83 keys
Keyboard size	<p>X=19.05 mm key pitch</p> <p>Y=18.05 mm key pitch</p>
Keyboard shortcuts	<p>Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. To type the alternate character, press Shift and the desired key. To perform secondary functions, press Fn and the desired key.</p> <p> NOTE: You can define the primary behavior of the function keys (F1–F12) changing Function Key Behavior in BIOS setup program.</p>

Camera

The following table lists the camera specifications of your Precision 5470.

Table 13. Camera specifications

Description		Values
Number of cameras		One
Camera type		HD RGB and IR camera
Camera location		Front camera
Camera sensor type		CMOS sensor technology
Camera resolution:		
	Still image	0.92 megapixel
	Video	1280 x 720 (HD) at 30 fps
Infrared camera resolution:		
	Still image	0.25 megapixel
	Video	640 x 400 at 30 fps
Diagonal viewing angle:		
	Camera	75.8 degrees
	Infrared camera	75.8 degrees

Touchpad

The following table lists the touchpad specifications of your Precision 5470.


Table 14. Touchpad specifications

Description		Values
Touchpad resolution:		>300 dpi
Touchpad dimensions:		
	Horizontal	105.95 mm (4.17 in.)
	Vertical	65.30 mm (2.57 in.)
Touchpad gestures		For more information about touchpad gestures available on Windows, see the Microsoft knowledge base article at support.microsoft.com .

Power adapter

The following table lists the power adapter specifications of your Precision 5470.

Table 15. Power adapter specifications

Description	Option one	Option two
Type	90 W AC adapter, USB-C (UMA only)	130 W AC adapter, USB-C (Discrete only)
Power-adapter dimensions:		
Height	22 mm (0.8 in.)	22 mm (0.8 in.)
Width	66 mm (2.6 in.)	66 mm (2.6 in.)
Depth	130 mm (5.1 in.)	143 mm (5.6 in.)
Input voltage	100 VAC x 240 VAC	100 VAC x 240 VAC
Input frequency	50 Hz / 60 Hz	50 Hz / 60 Hz
Input current (maximum)	1.50 A	1.80 A
Output current (continuous)	<ul style="list-style-type: none"> ● 20 V/4.50 A ● 15 V/3 A ● 9 V/3 A ● 5 V/3 A 	<ul style="list-style-type: none"> ● 20 V/6.50 A ● 5 V/1 A
Rated output voltage	<ul style="list-style-type: none"> ● 20 VDC ● 15 VDC ● 9 VDC ● 5 VDC 	<ul style="list-style-type: none"> ● 20 VDC ● 5 VDC
Temperature range:		
Operating	0°C to 40°C (32°F to 104°F)	0°C to 40°C (32°F to 104°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		


Battery

The following table lists the battery specifications of your Precision 5470.

Table 16. Battery specifications

Description	Values
Battery type	4-cell, 72 WHr, Lithium-ion, ExpressChargeBoost, ExpressCharge
Battery voltage	15.40 VDC
Battery weight (maximum)	0.285 kg (0.63 lb)
Battery dimensions:	
Height	8.25 mm (0.32 in.)

Table 16. Battery specifications (continued)

Description		Values
	Width	255.20 mm (10.05 in.)
	Depth	65.70 mm (2.59 in.)
Temperature range:		
	Operating	<ul style="list-style-type: none"> • Charge: 0°C to 50°C (32°F to 122°F) • Discharge: 0°C to 70°C (32°F to 158°F)
	Storage	-20°C to 60°C (-4°F to 140°F)
Battery operating time		Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions.
Battery charging time (approximate) ⓘ NOTE: Control the charging time, duration, start and end time, and so on using the Dell Power Manager application. For more information on the Dell Power Manager see, <i>Me and My Dell</i> on www.dell.com .		Express Charge Method: <ul style="list-style-type: none"> • 0 - 15°C maximum allowable charge time from 0 to 100% RSOC is 4 hours • 16 - 45°C normal express charge • 46 - 50°C maximum allowable charge time from 0 to 100% RSOC is 3 hours Standard Charge/Predominately AC User Charge Method: <ul style="list-style-type: none"> • 0 - 15°C maximum allowable charge time from 0 to 100% RSOC is 4 hours • 16 - 50°C maximum allowable charge time from 0 to 100% RSOC is 3 hours Express Charge Boost Charge Method (Fast Charge for Initial 35%): <ul style="list-style-type: none"> • 16 - 45°C target charge time from 0 to 35% RSOC is 20 mins for Accelerated Charge
Coin-cell battery		No coin-cell. Supported by main battery
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

Display

The following table lists the display specifications of your Precision 5470.

Table 17. Display specifications

Description	Option one	Option two
Display type	14-inch Full High Definition+ (FHD+)	14-inch Quad High Definition (QHD+)
Display-panel technology	Wide-viewing angle (WVA) narrow bent, TÜV low blue light	Wide-viewing angle (WVA), WLED, TÜV low blue light
Display-panel dimensions (active area):		
	Height	188.49 mm (7.42 in.)
	Width	301.59 mm (11.87 in.)
	Diagonal	355.6 mm (14.00 in.)
Display-panel native resolution	1920 x 1200	2560 x 1600

Table 17. Display specifications (continued)

Description	Option one	Option two
Luminance (typical)	500 nits	500 nits
Megapixels	2.30	4.09
Color gamut	100% sRGB	100% sRGB
Pixels Per Inch (PPI)	161 ppi	216 PPI
Contrast ratio (min.)	1200:1	1000:1
Response time (max.)	35 ms	35 ms
Refresh rate	60 Hz	60 Hz
Horizontal view angle	+/- 88 degrees	+/- 88 degrees
Vertical view angle	+/- 88 degrees	+/- 88 degrees
Pixel pitch	0.1572 mm	0.1178 mm
Power consumption (maximum)	2.85 W	3.70 W
Anti-glare vs glossy finish	Anti-glare	Anti-Reflection and Anti-Smudge on touch screen
Touch options	No	Yes with active pen support

Fingerprint reader

The following table lists the fingerprint-reader specifications of your Precision 5470.


 **NOTE:** The fingerprint reader is located on the power button.

Table 18. Fingerprint reader specifications

Description	Values
Fingerprint-reader sensor technology	Trans-capacitive sensing
Fingerprint-reader sensor resolution	500 DPI
Fingerprint-reader sensor pixel size	<ul style="list-style-type: none"> ● X: 108 ● Y: 88


Sensor

The following table lists the sensor of your Precision 5470.

Table 19. Sensor

Sensor support
Ambient Light Sensor
IR User
Accelerometer

Table 19. Sensor (continued)

Sensor support
Adaptive Thermal Performance (Lap vs. Desk mode) requires Gyro/Accelerometer  NOTE: This is for thermal only.
Hall Effect Sensor

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your Precision 5470.

Table 20. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel Iris X ^e Graphics	4 x Four Thunderbolt 4 ports with DisplayPort	Shared system memory	Intel 12 th Generation Intel Core i5/i7/i9

Multiple display support matrix

The following table lists the multiple display support matrix for your Precision 5470.

Table 21. Multiple display support matrix

Graphics Card	Direct Graphics Controller Direct Output Mode	Supported external displays with computer internal display on	Supported external displays with computer internal display off
Intel Iris X ^e Graphics	Integrated	3	4

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your Precision 5470.

Table 22. GPU—Discrete

Controller	External display support	Memory size	Memory type
NVIDIA RTX A1000 laptop	One DisplayPort 1.4	4 GB	GDDR6

Multiple display support matrix

The following table lists the multiple display support matrix for your Precision 5470.

Table 23. Multiple display support matrix

Graphics Card	Direct Graphics Controller Direct Output Mode
NVIDIA RTX A1000 laptop	MS Hybrid

Hardware security

The following table lists the hardware security of your Precision 5470.

Table 24. Hardware security

Hardware security
Trusted Platform Module (TPM) 2.0 discrete
FIPS 140-2 certification for TPM
TCG Certification for TPM (Trusted Computing Group)
Contacted Smart Card and Control Vault 3
Contactless Smart Card, NFC, and ControlVault 3
SED SSD NVMe, SSD, and HDD (Opal and non-Opal) per SDL
Finger Print Reader in Power Button
SED (Opal 2.0 only - PCIe Interface)

Smart-card reader

Contactless smart-card reader

This section lists the contactless smart-card reader specifications of your Precision 5470.

Table 25. Contactless smart-card reader specifications

Title	Description	Dell ControlVault 3 Contactless Smart-card reader with NFC
Felica Card Support	Reader and software capable of supporting Felica contactless cards	Yes
Prox (Proximity) (125 kHz) Card support	Reader and software capable of supporting Prox/Proximity/125 kHz contactless cards	No
ISO 14443 Type A Card Support	Reader and software capable of supporting ISO 14443 Type A contactless cards	Yes
ISO 14443 Type B Card Support	Reader and software capable of supporting ISO 14443 Type B contactless cards	Yes
ISO/IEC 21481	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens	Yes
ISO/IEC 18092	Reader and software capable of supporting ISO/IEC 21481 compliant contactless cards and tokens	Yes
ISO 15693 Card Support	Reader and software capable of supporting ISO15693 contactless cards	Yes
NFC Tag Support	Supports reading and processing of NFC compliant tag information	Yes
NFC Reader Mode	Support for NFC Forum Defined Reader mode	Yes

Table 25. Contactless smart-card reader specifications (continued)

Title	Description	Dell ControlVault 3 Contactless Smart-card reader with NFC
NFC Writer Mode	Support for NFC Forum Defined Writer mode	Yes
NFC Peer-to-Peer Mode	Support for NFC Forum Defined Peer to Peer mode	Yes
NFC Proximity OS Interface	Enumerates NFP (Near Field Proximity) device for OS to utilize	Yes
PC/SC OS interface	Personal Computer/Smart-Card specification for integration of hardware readers into personal computer environments	Yes
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers	Yes
Dell ControlVault support	Device connects to Dell ControlVault for usage and processing	Yes


 **NOTE:** 125 Khz proximity cards are not supported.

Table 26. Supported cards

Manufacturer	Card	Supported
HID	jCOP readertest3 A card (14443a)	Yes
	1430 1L	
	DESFire D8H	
	iClass (Legacy)	
	iClass SEOS	
NXP/Mifare	Mifare DESFire 8K White PVC Cards	Yes
	Mifare Classic 1K White PVC Cards	
	NXP Mifare Classic S50 ISO Card	
G&D	idOnDemand - SCE3.2 144K	Yes
	SCE6.0 FIPS 80K Dual+ 1 K Mifare	
	SCE6.0 nonFIPS 80K Dual+ 1 K Mifare	
	SCE6.0 FIPS 144K Dual + 1K Mifare	
	SCE6.0 nonFIPS 144K Dual + 1 K Mifare	
	SCE7.0 FIPS 144K	
Oberthur	idOnDemand - OCS5.2 80K	Yes
	ID-One Cosmo 64 RSA D V5.4 T=0 card	
	ID-One Cosmo 128K V5.5 card	
Gemalto	TOP DL GX4 144K card	Yes
Sony	Felica RC-S962	Yes
	Felica RC-S966	Yes
PIVKey	C910 PKI	Yes

Table 26. Supported cards (continued)

Manufacturer	Card	Supported
IDENTIV	PIV programmed cards	Yes

Contacted smart-card reader

The following table lists the contacted smart-card reader specifications of your Precision 5470.

Table 27. Contacted smart-card reader specifications

Title	Description	Dell ControlVault 3 Smart-card reader
ISO 7816 -3 Class A Card Support	Reader capable of reading 5 V powered smart-card	Yes
ISO 7816 -3 Class B Card Support	Reader capable of reading 3 V powered smart-card	Yes
ISO 7816 -3 Class C Card support	Reader capable of reading 1.8 V powered smart-card	Yes
T=0 support	Cards support character level transmission	Yes
T=1 support	Cards support block level transmission	Yes
EMVCo Compliant	Compliant with EMVCo (for electronic payment standards) smart-card standards as posted to www.emvco.com	Yes
EMVCo Certified	Formally certified based on EMVCO smart-card standards	Yes
PC/SC OS interface	Personal Computer/Smart-Card specification for integration of hardware readers into personal computer environments	Yes
CCID driver compliance	Common driver support for Integrated Circuit Card Interface Device for OS level drivers.	Yes
Dell ControlVault support	Device connects to Dell ControlVault for usage and processing	Yes

Operating and storage environment


This table lists the operating and storage specifications of your Precision 5470.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 28. Computer environment

Description	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing)	0% to 95% (non-condensing)
Vibration (maximum)*	0.66 GRMS	1.30 GRMS
Shock (maximum)	110 G†	160 G†

Table 28. Computer environment (continued)

Description	Operating	Storage
Altitude range	-15.2 m to 3048 m (4.64 ft to 10000 ft)	-15.2 m to 10668 m (4.64 ft to 35000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse.

Engineering specifications

Wireless module

Intel AX211, 2x2 MIMO, 2400 Mbps, 2.4/5/6 GHz, Wi-Fi 6E (WiFi 802.11ax), Bluetooth 5.2

The following table lists the Intel AX211 specifications.

Table 29. Intel AX211 specifications


Host interface	CNVi3 (Connectivity Integration 3 rd generation)
Network standard	IEEE 802.11a/b/g/n/ac/ax, 160MHz channel use, MU-MIMO, new 6GHz band
Wi-Fi Alliance certifications	Wi-Fi CERTIFIED 6, Wi-Fi CERTIFIED a/b/g/n/ac,WMM, WMM-Power Save, WPA2, WPA3, WPS, PMF,Wi-Fi Direct, Wi-Fi Agile Multiband  NOTE: Other names and brands may be claimed as the property of others.
Operating frequency bands	<ul style="list-style-type: none"> • 2.4 GHz • 5 GHz • 6 GHz
Data rate	<ul style="list-style-type: none"> • 2.4 GHz 40M: Up to 574 Mbps • 5/6 GHz 80M: Up to 1.2 Gbps • 5/6 GHz 160M: Up to 2.4 Gbps
Power consumption	Optimized power modes (sleep states) reduce power consumption during periods of inactivity
Security methods	<ul style="list-style-type: none"> • WPA2 Personal and Enterprise • WPA3
Authentication protocols	<ul style="list-style-type: none"> • 802.1X EAP-TLS • EAP-TTLS/MSCHAPv2 • PEAPv0 -MSCHAPv2 (EAP-SIM, EAP-AKA, EAP-AKA)
Encryption	<ul style="list-style-type: none"> • 64-bit and 128-bit WEP • TKIP • 128-bit AES-CCMP • 256-bit AES-GCMP
Product safety	<ul style="list-style-type: none"> • UL • C-UL • CB (IEC60950-1)
Management capabilities alerting	Support for Intel AMT
Government compliance	<ul style="list-style-type: none"> • FIPS 140-2 • FISMA
Client utility	Intel PRO/Set wireless software v22 and later

Table 29. Intel AX211 specifications (continued)



Antenna diversity	Supported
Radio On/Off	Supported
Roaming	Support seamless roaming between access points
Wake on wireless	Supported
Wireless display	Native Miracast support by Windows
Wireless PAN standard	<ul style="list-style-type: none"> • Dual Mode Bluetooth 5.2 • BLE
Bluetooth data rates	Up to 3 Mbps
Bluetooth operating frequency bands	2.4 GHz
Bluetooth profiles supported	Support for Microsoft Inbox Bluetooth profiles in Windows
Bluetooth data encryption	128-bit encryption
Bluetooth output power	Power class 1
Operating temperature	0°C to + 50°C (Full performance at shield temperatures up to 80°C)
Storage temperature	-40°C to +70°C
Humidity	Up to 90% RH non-condensing (at temperatures of 25° C to 35° C)

GPU—Integrated

Intel Iris X^e Graphics

The following table lists the Intel Iris X^e Graphics specifications.

Table 30. Intel Iris X^e Graphics specifications

Bus type	Integrated graphics  NOTE: Intel Iris X ^e Graphics uses the computers memory as video memory.
Memory type	LPDDR5
Memory interface	N/A (Unified Memory Architecture)
Estimated maximum power consumption (TDP)	12 W-28 W, included in the CPU power
Maximum color depth	10 bits
Maximum vertical refresh rate	Up to 120 Hz  NOTE: The refresh rate depends on the resolution.
External ports	Four DisplayPort 1.4 ports
Multiple display support	Up to 4 displays including laptop display

GPU—Discrete

NVIDIA RTX A1000 laptop, 4 GB, GDDR6

The following table lists the NVIDIA RTX A1000 laptop specifications.

Table 31. NVIDIA RTX A1000 laptop specifications

Feature	Values
GPU	NVIDIA RTX A1000 laptop
Cores	CUDA cores 2048
Memory bandwidth	176 Gbps
Memory type	GDDR6
Memory size	4 GB
Memory interface	128-bit
Memory configuration	4 x 8 GB (2CH x 256M x 16,14 Gbps)
GPU package	GB5B-128
TDP	<ul style="list-style-type: none"> GPU - 25.5 W Memory - 9.4 W
TGP	35 W
GPU base clock	630 MHz
GPU boost clock	1140 MHz
Vram clock	5501 MHz
PCIe	Gen 4 x 8
Features	<ul style="list-style-type: none"> Dynamic boost Configurable TGP
Concurrency	<ul style="list-style-type: none"> 80 W - 70% CPU + 100% GPU 90 W - 55% CPU + 100% GPU
Operating Systems Graphics/Video API Support	<ul style="list-style-type: none"> DirectX 12.0 OpenGL 4.6 DisplayPort 1.4 DirectX 12.1

Video port and resolution matrix

The following table lists the Video port and resolution matrix of your Precision 5470.

Table 32. Video port and resolution matrix

Port type	ThunderBolt 4 ports with DisplayPort (USB Type-C) (UMA and Discrete Graphics)
Maximum resolution—single display	7680 x 4320 @ 60 Hz
Maximum resolution—dual MST	4096 x 2304 @ 60 Hz, 1400 x 1050 @ 60 Hz or 2880 x 1800 @ 60 Hz, 2880 x 1800 @ 60 Hz
Maximum resolution—triple MST	4096 x 2304 @ 60 Hz, 1360 x 768 @ 60 Hz, 640 x 480 @ 60 Hz or 2304 x 1440 @ 60 Hz, 2304 x 1440 @ 60 Hz, 2304 x 1440 @ 60 Hz

Storage

M.2 2230, 256 GB, PCIe NVMe Gen4 x4, Class 35 SSD

The following table lists the M.2 2230, 256 GB SSD specifications.

Table 33. 256 GB SSD specifications

Capacity	256 GB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	30.00 mm (1.18 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	500,118,192
Power source	
Power consumption (reference only)	<ul style="list-style-type: none">● Idle: 5 mW (PS4)● Active: 4 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 512 GB SSD specifications.

Table 34. 512 GB SSD specifications

Capacity	512 GB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	1,000,215,216
Power source	
Power consumption (reference only)	<ul style="list-style-type: none">● Idle: 5 mW (PS4 - L1.2)● Active: 5 W

Table 34. 512 GB SSD specifications (continued)

Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 1 TB SSD specifications.

Table 35. 1 TB SSD specifications

Capacity	1 TB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	2,000,409,264
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> ● Idle: 5 mW (PS4 - L1.2) ● Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 2 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 2 TB SSD specifications.

Table 36. 2 TB SSD specifications

Capacity	2 TB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)

Table 36. 2 TB SSD specifications (continued)

Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	4,000,797,360
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 4 TB, PCIe NVMe Gen4 x4, Class 40 SSD

The following table lists the M.2 2280, 4 TB SSD specifications

Table 37. 4 TB SSD specifications

Capacity	4 TB
Height (approximate)	3.73 mm (0.15 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	8,001,573,552
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 512 GB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive

The following table lists the M.2 2280, 512 GB SSD, self-encrypting drive specifications

Table 38. 512 GB SSD, self-encrypting drive specifications

Capacity	512 GB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen3
Speed (maximum)	32 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	1,000,215,216
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 4.50 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 1 TB, PCIe NVMe Gen3 x4, Class 40 SSD, self-encrypting drive

The following table lists the M.2 2280, 1 TB SSD, self-encrypting drive specifications

Table 39. 1 TB SSD, self-encrypting drive specifications

Capacity	1 TB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen3
Speed (maximum)	32 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	2,000,409,264
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 4.50 W

Table 39. 1 TB SSD, self-encrypting drive specifications (continued)

Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 512 GB, PCIe NVMe Gen4 x4, Class 40 SSD, self-encrypting drive

The following table lists the M.2 2280, 512 GB SSD, self-encrypting drive specifications

Table 40. 512 GB SSD, self-encrypting drive specifications

Capacity	512 GB
Height (approximate)	2.38 mm (0.09 in.)
Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	64 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	1,000,215,216
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 5 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

M.2 2280, 1 TB, PCIe NVMe Gen4 x4, Class 40 SSD, self-encrypting drive

The following table lists the M.2 2280, 1 TB SSD, self-encrypting drive specifications

Table 41. 1 TB SSD, self-encrypting drive specifications

Capacity	1 TB
Height (approximate)	2.38 mm (0.09 in.)

Table 41. 1 TB SSD, self-encrypting drive specifications (continued)

Width (approximate)	22.00 mm (0.87 in.)
Depth (approximate)	80.00 mm (3.15 in.)
Interface type	PCIe Gen4
Speed (maximum)	32 Gb/s (up to 4 lanes)
MTBF	1.4M hours
Logical blocks	2,000,409,264
Power source	
Power consumption (reference only)	<ul style="list-style-type: none"> • Idle: 5 mW (PS4 - L1.2) • Active: 4.50 W
Environmental operating conditions (non-condensing)	
Temperature range	0°C to 70°C
Relative humidity range	10% to 90%
Op shock	1500G
Environmental non-operating conditions (non-condensing)	
Temperature range	-40°C to 70°C
Relative humidity range	5% to 95%

Media-card reader

The following table lists the media-card reader specifications of your Precision 5470.

Table 42. Media-card reader (standard offering)

Media supported (Maximum capacity supported will vary by Flash Media Types)	
Media Supported	micro-SDXC, micro-SDHC, Micro-SD micro-Secure Digital (micro-SD) 4.0 UHS-II micro-Secure Digital (micro-SD) 3.0 UHS-I
Support Specification Versions	micro-Secure Digital (SD) 4.0
Power source	
Max Power Requirements	1.2 A
Supply Voltage Range	3.3 V
Power Consumption	MS 0.08 mA
Environmental operating conditions (Non-condensing)	
Operating Temperature Range	0°C to 70°C
Relative Humidity Range	N/A
Environmental non-operating conditions (Non-condensing)	
Operating Temperature Range	N/A
Relative Humidity Range	N/A

Power adapter

The following table lists the power adapter specifications of your Precision 5470.

Table 43. Power adapter specifications

Description	Values	
Type	90 W	130 W
Diameter (connector)	Not supported	Not supported
Input voltage	90 VAC to 264 VAC	90 VAC to 264 VAC
Input frequency	47 Hz to 63 Hz	47 Hz to 63 Hz
Input current (maximum)	4.2 A	4.2 A
Output current (continuous)	<ul style="list-style-type: none"> ● 12 VA/16.5 A ● 12 VB/18 A Standby mode: <ul style="list-style-type: none"> ● 12 VA/1.5 A ● 12 VB/2.5 A 	<ul style="list-style-type: none"> ● 12 VA/16.5 A ● 12 VB/18 A Standby mode: <ul style="list-style-type: none"> ● 12 VA/1.5 A ● 12 VB/2.5 A
Rated output voltage	<ul style="list-style-type: none"> ● +12 VA ● +12 VB 	<ul style="list-style-type: none"> ● +12 VA ● +12 VB
BTUs/h (based on PSU max wattage)	888	888
Temperature range		
Operating	5°C to 45°C (41°F to 113°F)	5°C to 45°C (41°F to 113°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)
Compliance		
Erp Lot6 Tier 2 requirement	Yes	Yes
80Plus compliant	Yes	Yes
Energy Star 8.0 compliant	Yes	Yes
GS mark compliant	Yes	Yes
NCTC Anti Power Surge certification	Yes	Yes
NCTC Anti Lightning Strike certification	Yes	Yes

Accessories

The following table lists the supported accessories on your Precision 5470.

Table 44. Accessories

Accessories
Dell Premier Multi-Device Wireless Keyboard and Mouse - KM7321W
3Dconnexion SpaceMouse Wireles
Dell Premier Rechargeable Active Pen - P/N:7522W

Table 44. Accessories (continued)

Accessories	
Dell Premier Rechargeable Wireless Mouse - MS7421W	
Wacom Cintiq Pro 24 Creative Pen Display Touch - DTH-2420	

Security

Software security

The following table lists the software security details of your Precision 5470.

Table 45. Software security

Security options	
McAfee Small Business Security 30 Day Free Trial	
McAfee Small Business Security 12-month subscription	
McAfee Small Business Security 36 month Subscription	
Intel Guard Technologies & Secure Key: Software Guard (SGX), Data Guard (vPro only), Boot Guard, BIOS Guard (Core CPU's only), OS Guard (Core CPU's only) and Secure Key (i5 or greater only)	
Intel Runtime BIOS Resilience (Copper Point) with attestation via Nifty Rock + Intel TXT	
Support of Absolute Persistent Module BIOS agent v2	
OpenXT validation required	
SafeGuard and Response, powered by VMware Carbon Black and Secureworks	
Next Generation Antivirus (NGAV)	
Endpoint Detection and Response (EDR)	
Threat Detection and Response (TDR)	
Managed Endpoint Detection and Response	
Incident Management Retainer	
Emergency Incident Response	
SafeData	

Fingerprint reader

The following table lists the fingerprint reader specifications of your Precision 5470.

Table 46. Fingerprint reader specifications

Category	Goodix—GF5288WNC
Sensor technology	Capacitive sensing
Sensor resolution	500 dpi
Sensor size	5.48 mm x 4.47 mm
Sensor pixel size	108 x 88 pixels
Dell ControlVault support	No
Dell ControlVault 3.0 support	No

Table 46. Fingerprint reader specifications (continued)

Anti-spoofing	Yes
Template storage	In-sensor storage
Match on chip	Yes
FIPS 201 certified	No

Dell ControlVault 3.0

The following table lists the Dell ControlVault 3.0 specifications of your Precision 5470.

Table 47. Dell ControlVault 3.0 specifications

Title	Description	Dell ControlVault 3.0
CPU technology	N/A	1 GHz ARM Cortex A7
RAM	N/A	1 MB
ROM	N/A	16 MB
TPM included	TPM enumeration included within ControlVault	No
Host Interface	N/A	USB 2.0
Fingerprint procession on chip	Fingerprint processing occurs within secure boundary of ControlVault	No
Windows WBF support	Support for Windows biometric framework when Fingerprint reader is attached	No
FIPS 140-2 level 3 complaint	Device complaint with FIPS 140-2 level 3 requirements	Yes
FIPS 140-2 level 3 certified	Device certified with FIPS 140-2 level 3 requirements	Yes

Trusted Platform Module

The following table lists the Trusted Platform Module (TPM) of your Precision 5470.

Table 48. Trusted Platform Module (TPM)

TPM: ST/ST33 HTPH2X32AHD8
SPI interface
TPM 2.0
FIPs 140-2 certificate

Mil-SPEC

The Precision 5470 meets military specifications for the following MIL-STD 810H tests:

Table 49. Tower - Military specifications

Test Category	Test Method	Test Parameters
Non-operating altitude test	Method 500.6 Procedure I	Test specification: <ul style="list-style-type: none">• Altitude: 15,000 ft• Temperature: 21°C

Table 49. Tower - Military specifications (continued)

Test Category	Test Method	Test Parameters
Operating altitude test	Method 500.6 Procedure II	Test specification: <ul style="list-style-type: none"> Altitude: 15,000 ft Temperature: 21°C
Non-operating high temperature test	Method 501.7 Procedure I	Test specification: <ul style="list-style-type: none"> High temperature cycles (33°C–71°C), climatic category A1 - Hot dry Duration: 7 cycles, Non-Operating
Operating high temperature test	Method 501.7 Procedure II	Test specification: <ul style="list-style-type: none"> Temperature: 32°C–49°C Duration: 5 cycles, Operating
Non-operating low temperature test	Method 502.7 Procedure I - Storage	Test specification: <ul style="list-style-type: none"> Temperature: -51°C Duration: 24 hours
Operating low temperature test	Method 502.7 Procedure II - Operation	Test specification: <ul style="list-style-type: none"> Temperature: -29°C Duration: 24 hours
Humidity test	Method 507.6 Procedure I	Induced B3 <ul style="list-style-type: none"> Duration: Hot-humid, 24 hours exposure Induced B3, Non-operating
Sand and dust - Blowing dust	Method 510.7 Procedure I	Test specification: <ul style="list-style-type: none"> Relative humidity: 30% Temperature: 60°C Air flow velocity: 1.5 m/s to 8.9 m/s
Operating Vibration	Method 514.8 Procedure I, Category 4	Test specification: <ul style="list-style-type: none"> 5 Hz–500 Hz, 1.17 Grms Duration: 1 hr on Bottom, Left, and Back side
Non-Operating Vibration - Minimum integrity test	Method 514.8 Procedure I, Category 24	Test specification: <ul style="list-style-type: none"> 20 Hz–2000 Hz, 7.69 Grms Duration: 1 hr/axis Axis: X, Y, and Z
Shock - Functional shock	Method 516.8 Procedure I	185 g, 2 ms Half Sine 1 shock/axis/direction for a total of 6 shocks
Shock - Transportation shock	Method 516.8 Procedure II	i NOTE: Dell to use Half Sine Waveform to replace Saw Tooth Waveform in accordance with MIL SPEC.
Shock - Transit drop	Method 516.8 Procedure IV	Modified: 26 X 30-inch drops onto 2-inch of plywood over non-yielding surface.
Shock - Crash hazard shock	Method 516.8 Procedure V	185 g, 2 ms Half Sine 2 shock/axis/direction for a total of 12 shocks
Shock - Bench handling	Method 516.8 Procedure VI	i NOTE: Dell to use noted test to replace MIL-STD-8108, Method 516.8, Procedure V, Table 516.8-XIII

Chemical information

The Precision 5470 meets chemical information for the following MIL-STD 810H tests:

Table 50. Chemical information

Chemical	Source document	Possible uses
Cleaning compound, solvent (Rifle bore cleaner)	MIL-PRF-372	Small arms, textiles, general
Degreasing Solvent Naphtha or Stoddard, dry cleaning, or D-Limonene solvent	MIL=PRF-680 (NATO #S-752, S-753, S-760)	Small arms, textiles, general, helicopters (parts)
Engine oil	MIL=PRF-2140, (NATO #)-1236/15W40), 40, 30 (NATO O-238), 10 W, 10 W (NATO-O-237,SCPL (equipment specific)	Small arms, textiles, general
Lubricant, semi-fluid, automatic weapons	MIL-L-46000 (NATO #O-158)	Small arms, textiles, general
Lubricating oil, general purpose, preservative (water displacing, low temperature)	MIL=PRF-32033 (NATO #O-190)	Small arms, textiles, general
Lubricant, cleaner, and preservative	MIL=PRF-63460 (CLP), (NATO #S-758)	Small arms, textiles, general
Gasoline, commercial, or combat	ASTM D910, Aviation Gasoline; ASTM D4814, Automatic spark ignition engine (Commercial and MOGAS) and others as indicated by test requirements.	Small arms, textiles, general
Aviation Turbine fuels, kerosene types	Aviation turbine fuel JP-8 (NATO F-34); NATO Grade F-24, ASTM D1655; Commercial fuel, Jet A, Jet A-1 and others as indicated by test requirements.	Small arms, textiles, general, helicopters (parts)
Diesel Fuel, (DL-1, DL-2, other Grades)	A-A-52557, ASTM D975, (NATO #F-54)	Small arms, textiles, general
Insect repellent, personal application	NSN 6840-01-284-3982, Creme, approx 32%	Small arms, textiles, general
Dexron III	NSN 9150-00-698-2382, Automatic Transmission Fluid, Commercial	Small arms, textiles, general
Antifreeze, Multi Engine Type, ethylene (I) or propylene glycol (II)	A-A-52624, ASTM D6210 Type I, ASTM D6211 Type II, (NATO #s-750)	Small arms, textiles, general
Water	Water (distilled). Used as baseline where applicable.	Small arms, textiles, general
Simulated sea water or 5% NaCl	ASTM D1141 or ASTM B117	Small arms, textiles, general
Decontamination agent STB	MIL-DTL-12468	Small arms, textiles, general
Lubricating oil, weapons, low temperature	MIL-PRF-14107 (LAW), (NATO #O-157)	Small arms, textiles, general
Hydraulic fluid, synthetic hydrocarbon base, aircraft, missile and ordnance	MIL-PRF-87257 (NATO #H-538) or MIL-PRF-83282 (NATO #H-537)	Small arms, textiles, general, helicopters (parts)

Table 50. Chemical information (continued)

Chemical	Source document	Possible uses
(OHA), others as indicated by test requirements.		
Hydraulic fluid, rust inhibited, phosphate based synthetic hydrocarbon, fire-resistant	MIL-PRF-46170 (FRH, (NATO #H-544)	Small arms, textiles, general
Hydraulic fluid, petroleum based for preservation and operation (OHT)	MIL-PRF-6083, (NATO #635)	Small arms, textiles, general
DS-200 Decontaminating agent	NSN 6850-01-501-1044, Peroxide based	Small arms, textiles, general
Lubricating oils synthetic, Aircraft turbine engines, transmissions	MIL-PRF-23699, NATO #O-156; MIL-PRF-7808 (NATO O-152, O-154, O-156, O-167)	Aircraft (parts)
De-icers, Anti-Icing	Deicers-Aircraft: Ethylene or propylene glycol mixtures; US antifreeze: AA-52624A (NATO S-750), and others as indicated by test requirements.	Aircraft
Silicone based damping fluid (various viscosities, csts)	Dimethyl silicone (NATO S-1714)	Aircraft (parts)
Aircraft cleaners, aerospace, ground equipment/aircraft interior/exterior	MIL-PRF 87937, MIL-PRF-85570, MIL-C-87936, MIL-PRF-85704 or others as indicated	Small arms, textiles, general, aircraft (parts)
Other solvents	Denatured or Isopropyl alcohol (2-propanol), acetone, etc.	Aircraft (parts)
Deicing and antifreeze fluids	Deicers-Aircraft: Ethylene or propylene glycol mixtures; US antifreeze: AA-52624 (NATO S-750), and others as indicated by test requirements.	Aircraft (parts)
Runway deicers	Potassium-acetate based solution (Cryotech E-36 or other as indicated by test requirements).	Aircraft (parts)
Insecticides	Insecticides (Malathion or pyrethrin as indicated by test requirements).	Aircraft (parts)
Disinfectant (Heavy duty phenolics)	<ul style="list-style-type: none"> • Clear, soluble phenolics, e.g., phenol or its derivatives dissolved in a surfactant and diluted with water to give a clear solution. • Parachlorometaxyleneol (EcoTru-1453, Aircraft Disinfectant or others as indicated by test requirements. 	Aircraft (parts)
Coolant dielectric fluid	Polyalphaolefin (PAO) dielectric	Aircraft (parts)

Table 51. Precision 5470 specific testing

Test Name	Test procedure	Specifications
Dust ingress protection	IEC 60529, IP-Xx	IP-5x <ul style="list-style-type: none"> • Complete protection against contact

Table 51. Precision 5470 specific testing

Test Name	Test procedure	Specifications
		<ul style="list-style-type: none"> Non-operating

Thermal and acoustic improvements

The following table lists the thermal and acoustic improvements of your Precision 5470.

Table 52. Thermal and acoustic improvements

100% dual heat pipe	Increase the heat capacity to improve thermal dissipation
Better system tuning/setting	Get higher performance and good user experience
Pro-OS enhanced thermal setting (Dynamic PL1)	Increases boot-up time
Linear fan control	Fan speed ramp more smoothly for better user experience, no more significant acoustic changing
DDT SSD setting	Protecting the SSD device in high temperature and worse cases to prevent blue screen of death (BSOD)
IEC 60529 ingress protection: IP-54	<ul style="list-style-type: none"> Dust protected Protected against dripping water
Better acoustic experience	Enhance acoustic to 0.6 sone during daily working conditions and fan off when system is idle

System management features

Dell commercial systems come with a number of systems management options that are include by default for In-Band management with our Dell Client Command Suite. In-Band management meaning that the Operating System is functional and the device is connected to a network so that it can be managed. The Dell Client Command Suite of tools can be leveraged individually or with a systems management console like SCCM, LANDESK, KACE, etc.

We also offer Out-of-Band management as an option. Out-of-band management is when the system does not have a functional operating system or is turned off and you still want to be able to manage the system in that state.

Dell Client Command Suite for In-Band systems management

Dell Client Command Suite is a free toolkit available for download, for all Latitude Rugged tablets at dell.com/support, that automates and streamlines systems management tasks, saving time, money, and resources. It consists of the following modules that can be used independently, or with a variety of systems management consoles such as SCCM.

Dell Client Command Suite's integration with VMware Workspace ONE Powered by AirWatch, now allows customers to manage their Dell client hardware from the cloud, using a single Workspace ONE console.

Dell Command | Deploy enables easy operating system (OS) deployment across all major OS deployment methodologies and provides numerous system-specific drivers that have been extracted and reduced to an OS-consumable state.

Dell Command | Configure is a graphical user interface (GUI) admin tool for configuring and deploying hardware settings in a pre-OS or post-OS environment, and it operates seamlessly with SCCM and Airwatch and can be self-integrated into LANDesk and KACE. Simply, this is all about the BIOS. Command | Configure allows you to remotely automate and configure over 150+ BIOS settings for a personalized user experience.

Dell Command | PowerShell Provider can do the same things as Command | Configure, but with a different method. PowerShell is a scripting language that allows customers to create a customized and dynamic configuration process.

Dell Command | Monitor is a Windows Management Instrumentation (WMI) agent that provides IT admins with an extensive inventory of the hardware and health-state data. Admins can also configure hardware remotely by using command line and scripting.

Dell Command | Power Manager (end-user tool) is a GUI-based factory-installed battery management tool that allows end users to choose the battery management methods that meet their personal preferences or work schedule without sacrificing IT's capability to control those settings with Group Policy.

Dell Command | Update (end-user tool) is factory-installed and allows admins to individually manage and automatically present and install Dell updates to the BIOS, drivers, and software. Command | Update eliminates the time-consuming hunting and pecking process of update installation.

Dell Command | Update Catalog provides searchable metadata that allows the management console to retrieve the latest system-specific updates (driver, firmware or BIOS). The updates are then delivered seamlessly to end-users using the customer's systems management infrastructure that is consuming the catalog (like SCCM).


Dell Command | vPro Out of Band console extends hardware management to systems that are offline or have an unreachable OS (Dell exclusive features).

Dell Command | Integration Suite for System Center - This suite integrates all the key components of the Client Command Suite into Microsoft System Center Configuration Manager 2012 and Current Branch versions.

Out of Band Systems Management

Intel Standard Manageability option **must be configured in our factory at the time of purchase, as it is NOT field upgradable.** It offers out-of-band management and DASH compliance (https://registry.dmtf.org/registry/results/field_initiative_name%3A%22DASH%201.0%22).

Low blue light

 **WARNING: Prolonged exposure to blue light from the display may lead to long-term effects such as eye strain, eye fatigue, or damage to the eyes.**

Blue light is a color in the light spectrum which has a short wavelength and high energy. Chronic exposure to blue light, particularly from digital sources, may disrupt sleep patterns and cause long-term effects such as eye strain, eye fatigue, or damage to the eyes.

The display on this computer is designed to minimize blue light and complies with TÜV Rheinland's requirement for low blue light displays.

Low blue light mode is enabled at the factory, so no further configuration is necessary.

To reduce the risk of eye strain, it is also recommended that you:

- Position the display at a comfortable viewing distance between 20 and 28 inches (50 and 70 cm) from your eyes.
- Blink frequently to moisten your eyes, wet your eyes with water, or apply suitable eye drops.
- Look away from your display, and gaze at a distant object at 20 ft (609.60 cm) away for at least 20 seconds during each break.
- Take an extended break for 20 minutes every two hours.

Dell Optimizer

This section details the Dell Optimizer specifications of your Precision 5470.

On Precision 5470 with Dell Optimizer, the following features are supported:

- **Express Connect**—Automatically joins the access point with the strongest signal, and directs bandwidth to conferencing applications when in use.
- **Express Sign-in**—The Intel Context Sensing Technology's proximity sensor detects your presence to instantly wake up the computer and login using the IR camera and Windows Hello feature. Windows locks when you walk away.
- **ExpressResponse**—Prioritizes the most important applications. Applications open faster and perform better.
- **ExpressCharge**—Extends the battery runtime and improves battery performance by adapting to your patterns.
- **Intelligent Audio** — Automatically detects your voice and stabilizes your system's volume for an enhanced conferencing experience.

For more information about configuring and using these features, see [Dell Optimizer User Guide](#).

Color, material, and finish

This section details the color, material, and finish (CMF) specifications of your Precision 5470.

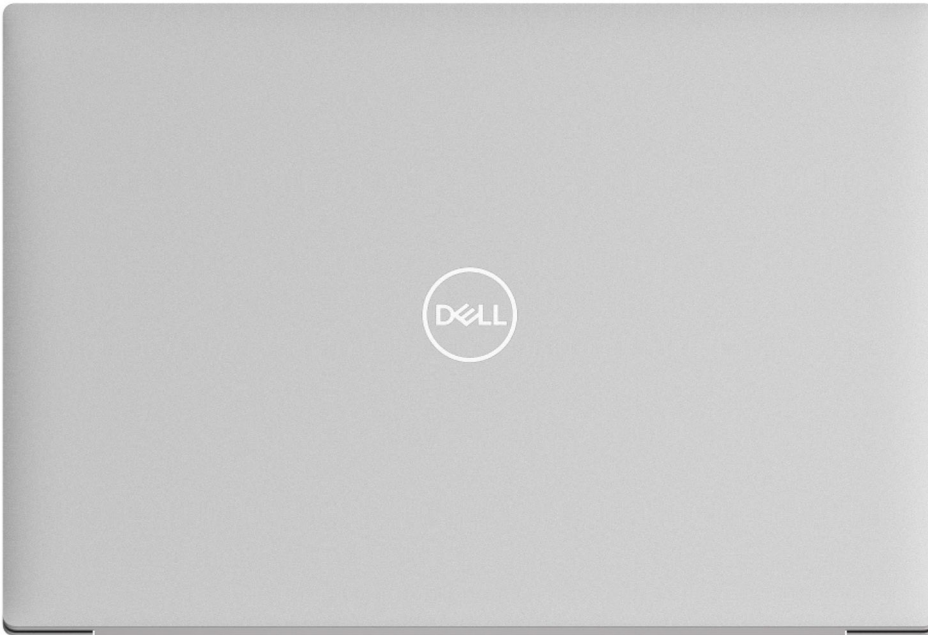


Table 53. CMF specifications

A Cover (Top)	<ul style="list-style-type: none"> Material: Aluminum + CNCS + Beadblast + Anodize Color: Anodized Titan Gray, beadblast Finish: 11+/-3 GU
B Cover (Touch)	<ul style="list-style-type: none"> Material: Plastic As Molded Color: Dell Standard Black Finish: Resin Finish MT 11005
B Cover (Non-Touch)	<ul style="list-style-type: none"> Material: PC Process UV Molding + CNC + Back Printing Color: Color Match to Anodized Dino Bezel Black Finish Finish: See Dell Approved Sample
C Cover (Palmrest)	<ul style="list-style-type: none"> Material: Carbon fiber Hybrid Molding + Painted (Basecoat + Tinted Velvet Topcoat) + Drill Holes Color: Fiber Black Dark Velvet WPUST Finish: 2+2/-1GU
D Cover (Bottom)	<ul style="list-style-type: none"> Material: Aluminum + CNCS + Beadblast + Anodize Color: Anodized Titan Gray BB Dull (5052) Finish: 11+/-3 GU

Keyboard shortcuts of Precision 5470

NOTE: Keyboard characters may differ depending on the keyboard language configuration. Keys used for shortcuts remain the same across all language configurations.

Some keys on your keyboard have two symbols on them. These keys can be used to type alternate characters or to perform secondary functions. The symbol shown on the lower part of the key refers to the character that is typed out when the key is pressed. If you press shift and the key, the symbol shown on the upper part of the key is typed out. For example, if you press **2**, **2** is typed out; if you press **Shift + 2**, **@** is typed out.

The keys F1-F12 at the top row of the keyboard are function keys for multi-media control, as indicated by the icon at the bottom of the key. Press the function key to invoke the task represented by the icon. For example, pressing F1 mutes the audio (refer to the table below).

However, if the function keys F1-F12 are needed for specific software applications, multi-media functionality can be disabled by pressing **Fn + Esc**. Subsequently, multi-media control can be invoked by pressing **Fn** and the respective function key. For example, mute audio by pressing **Fn + F1**.

NOTE: You can also define the primary behavior of the function keys (F1–F12) by changing **Function Key Behavior** in BIOS setup program.

Table 54. List of keyboard shortcuts

Function key	Primary behavior
F1	Mute audio
F2	Decrease volume
F3	Increase volume
F4	Mute Microphone
F5	Click keyboard backlight (optional). NOTE: Non-backlight keyboards have F10 function key without the backlight icon and do not support toggle keyboard backlight function. NOTE: Toggle to cycle the keyboard backlight status through off, low-backlight, and high-backlight
F6	Decrease brightness
F7	Increase brightness
F8	Switch Display
F10	Print screen
F11	Home
F12	End

The **Fn** key is also used with selected keys on the keyboard to invoke other secondary functions.

Table 55. Secondary behavior

Function key	Secondary behavior
Fn + F1	Operating system and application specific F1 behavior
Fn + F2	Operating system and application specific F2 behavior
Fn + F3	Operating system and application specific F3 behavior
Fn + F4	Operating system and application specific F4 behavior

Table 55. Secondary behavior (continued)



Function key	Secondary behavior
Fn + F5	Operating system and application specific F5 behavior
Fn + F6	Operating system and application specific F6 behavior
Fn + F8	Operating system and application specific F8 behavior
F9	Operating system and application specific F9 behavior
Fn + F10	Operating system and application specific F10 behavior
Fn + F11	Operating system and application specific F11 behavior
Fn + F12	Operating system and application specific F12 behavior
Fn + B	Pause/Break
Fn + Insert	Sleep
Fn + S	Toggle scroll lock
Fn + H	Toggle between power and battery-status light/hard-drive activity light
Fn + R	System request
Fn + Ctrl	Open application menu
Fn + Esc	Toggle Fn-key lock
Fn + PgUp	Page up
Fn + PgDn	Page down

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 56. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.